

Time consuming site construction work for the installation of tanks to store diesel fuel, white spirit and other **semi-hazardous liquids** is no longer a problem.

A tank-within-a-tank or 'Bunded Tank' by the Birmingham specialists, J A Envirotanks needs only a suitable hard standing. It has the very useful additional advantage of being portable from site to site and planning permission may not normally be required.


The new tank is available in a range of sizes from 1,000 litres up to 55,000 litres. The outer 'Bund' tank normally has a capacity of 110% compared with the inner tank to ensure any leakage is safely contained.

The complete package comprises the storage tank, fitted inside its 'Bund' tank, all ancillary pipework, valves, contents gauge, caps and lifting lugs. A dispensing pump and fuel monitoring equipment can also be fitted, if required, with all pipework connected and wired to the isolating switch.

After connection to a mains supply the package is ready for use.

Fabricated from mild steel plate the tanks are protected by two coats of red oxide primer or a zinc alkyd primer and a coat of gloss finish paint for weatherproofing.

J A Envirotanks deliver the complete package as a unit to the customer's premises. If, at a later date, a new site for the 'Bunded Tank' is required it has only to be emptied of liquid, lifted onto a truck and transported to its new location.

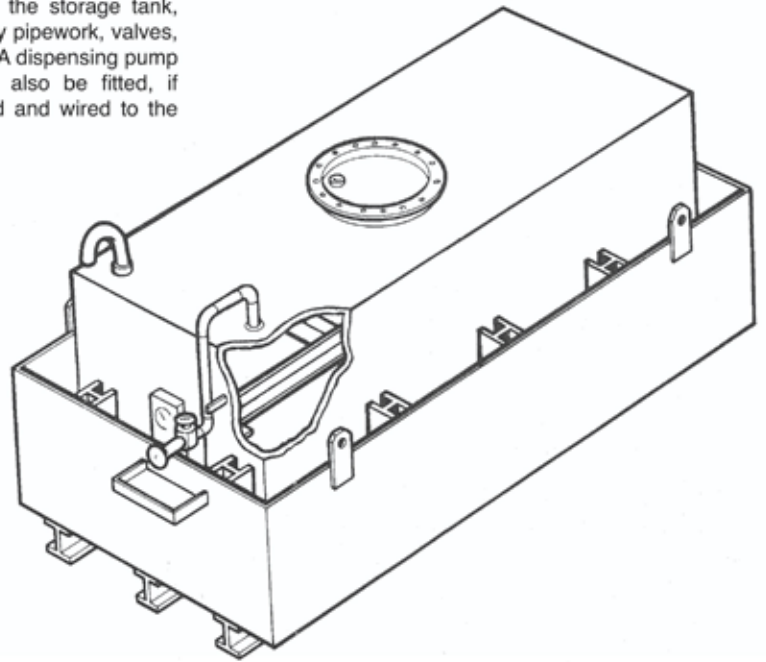

### Optional Equipment

- 50mm/65mm/80mm diameter fill pipe complete with valve and brass cap
- Vent complete with bird guard
- 25mm diameter sludge complete with valve and plug
- 40mm diameter draw off in complete with valve and plug
- Hydrostatic contents guage complete with capillary tube and bracketed to the bund tank
- New commercial high-speed pump with 12 months warranty
- Low duty pump suitable for fork trucks, etc., or one high-speed new pump complete with fuel monitoring equipment recording the fuel allocated to each vehicle - 25 cards
- Flowmeter fitted with manual nozzle (elevated tanks only) suitable for fork trucks
- All electric pumps wired to firemans switch mounted on bund. All pumps supplied with automatic cut-off nozzle
- Access ladder and platform in galvanised finish
- Cabinet with lockable doors (optional) cabinet will extend the overall length by 750mm

No.	Tank size mm	Capacity Litres	Bund size mm	Weight approx kgs.
B01	1828 x 1219 x 1219 x 5 thick	2727	2438 x 1828 x 686 x 5 thick	1050
B02	2438 x 1219 x 1524 x 5 thick	4545	3048 x 1828 x 914 x 5 thick	1500
B03	3048 x 1219 x 1524 x 5 thick	5682	3657 x 1828 x 914 x 6 thick	1800
B04	3048 x 1524 x 1524 x 5 thick	6818	3657 x 2311 x 914 x 6 thick	2150
B05	3048 x 1219 x 2438 x 5 thick	9091	3962 x 2133 x 1219 x 6 thick	2880
B06	3048 x 1524 x 2438 x 6 thick	11364	4191 x 2438 x 1219 x 6 thick	3490
B07	3048 x 1828 x 2438 x 6 thick	13637	3657 x 2743 x 1524 x 6 thick	3820
B08	3048 x 2438 x 2438 x 6 thick	18183	3657 x 3505 x 1524 x 6 thick	4420
B09	3962 x 2438 x 2438 x 6 thick	22729	4876 x 3429 x 1524 x 6 thick	5530
B10	4572 x 2438 x 2438 x 6 thick	27275	5486 x 3352 x 1676 x 6 thick	6090
B11	5486 x 2438 x 2438 x 6 thick	31821	6400 x 3352 x 1676 x 6 thick	6920
B12	6096 x 2438 x 2438 x 6 thick	36367	7010 x 3352 x 1701 x 6 thick	7420
B13	6096 x 2438 x 2743 x 6 thick	40913	7315 x 3352 x 1829 x 6 thick	8500
B14	6096 x 2438 x 3048 x 6 thick	45459	7315 x 3352 x 1981 x 6 thick	9230