


### ENVIROTANK-SAFE RECTANGULAR ABOVEGROUND ENCLOSED BUNDED STORAGE TANK WITH SECONDARY REMOVABLE PITCHED ROOF FOR TOTAL SECURITY

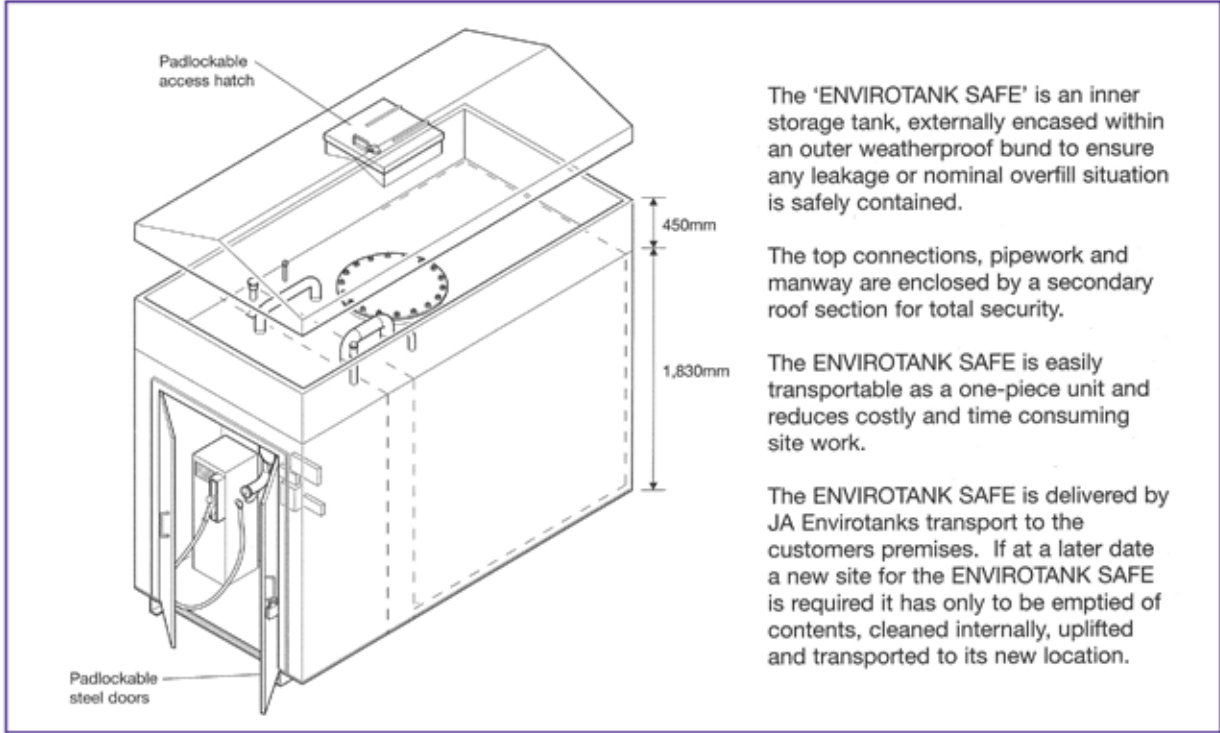

The 'ENVIROTANK SAFE' is an inner storage tank, externally encased within an outer weatherproof bund to ensure any leakage or nominal overflow situation is safely contained.

The top connections, pipework and manway are enclosed by a secondary roof section for total security.

The ENVIROTANK SAFE is easily transportable as a one-piece unit and reduces costly and time consuming site work.

The ENVIROTANK SAFE is delivered by JA Envirotanks transport to the customers premises. If at a later date a new site for the ENVIROTANK SAFE is required it has only to be emptied of contents, cleaned internally, uplifted and transported to its new location.

#### Advantages

- Weatherproof.
- Space saving.
- Reduced maintenance costs.
- Enclosed bunded tank.
- Cuts costly site work.
- Needs only suitable hard standing.
- Easily transportable.
- Overfilled product can be re-used.
- Sizes/capacity to suit most situations.
- Finished in green or black oil resistant paint.
- Clients own in-house colours can be accommodated on request.
- Offloading and positioning facilities available if required.
- The optional security cabinet will extend the overall length of the unit by **750mm**.


Ref	Capacity of Main Tank Itr	Length mm	Width mm	Height mm	Weight Kilo's
S30	2000	1180	1100	1830	1136
S31	3000	1660	1180	1830	1344
S32	5000	2170	1485	1830	1954
S33	7000	2520	1790	1830	2448
S34	10000	3590	1790	1830	3171
S35	15000	4020	2398	1830	4195
S36	20000	5360	2398	1830	5267
S37	25000	6700	2398	1830	6326
S38	30000	6410	3008	1830	7102
S39	40000	8550	3008	1830	9075
S40	50000	10690	3008	1830	10876
S41	60000	10660	3618	1830	11825
S42	70000	12440	3618	1830	14201
S43	80000	14220	3618	1830	16023

#### Additional Fittings

- 50mm, 65mm or 80mm fill pipe c/w valves, tanker coupling and cap.
- Venting assembly sized to suit.
- Sludge drain pipe.
- 40mm outlet pipe with valve.
- Electric bund monitoring with alarm.
- Contents gauge in litres.
- Overfill alarm and/or overfill prevention valve.
- Dipstick, dip pipe, cap and chain.
- Dispensing pumps with safety break couplings and automatic nozzle. (3m hose supplied)
- Fuel monitoring systems.
- Optional galvanised ladder and platform.
- Optional distribution board and lighting.
- Optional security cabinet with aluminium roller shutter door and steel doors.



# ENVIROTANK RECTANGULAR ABOVEGROUND ENCLOSED BUNDED STORAGE TANK

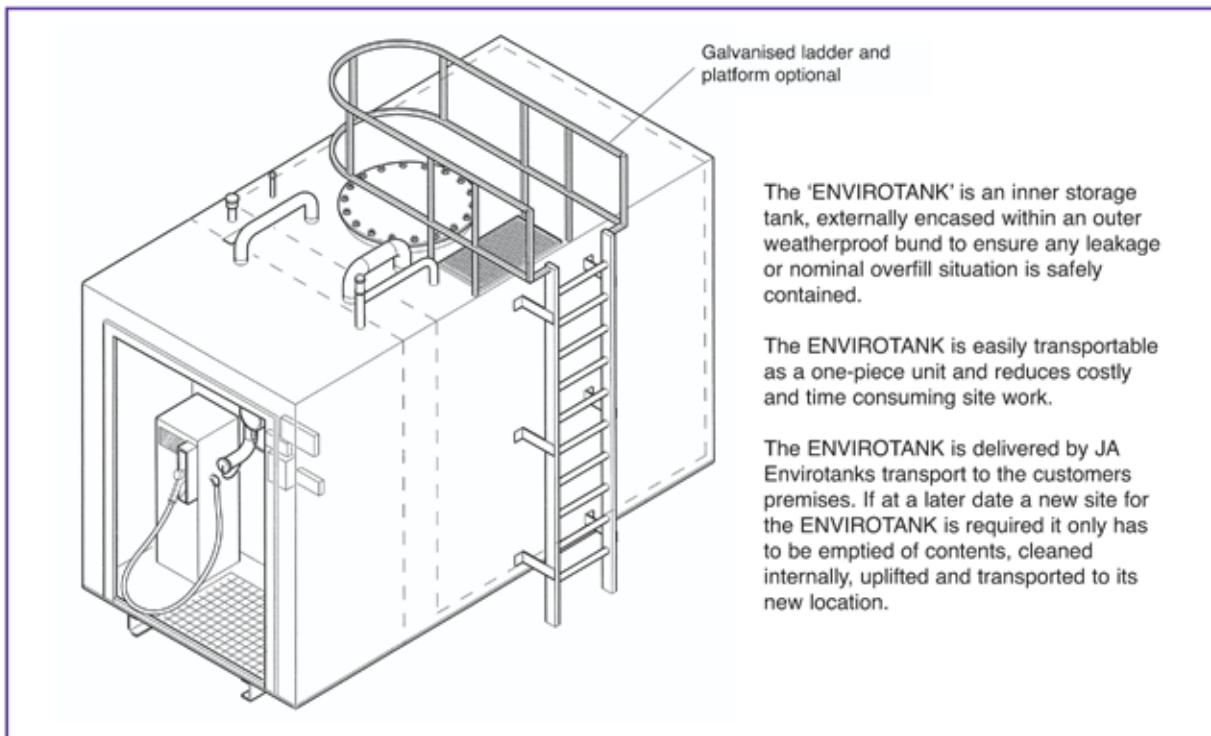

Galvanised ladder and platform optional

The 'ENVIROTANK' is an inner storage tank, externally encased within an outer weatherproof bund to ensure any leakage or nominal overflow situation is safely contained.

The ENVIROTANK is easily transportable as a one-piece unit and reduces costly and time consuming site work.

The ENVIROTANK is delivered by JA Envirotanks transport to the customers premises. If at a later date a new site for the ENVIROTANK is required it only has to be emptied of contents, cleaned internally, uplifted and transported to its new location.

## Advantages

- Weatherproof.
- Space saving.
- Reduced maintenance costs.
- Enclosed bunded tank.
- Cuts costly site work.
- Needs only suitable hard standing.
- Easily transportable.
- Overfilled product can be re-used.
- Sizes/capacity to suit most situations.
- Finished in green or black oil resistant paint.
- Clients own in-house colours can be accommodated on request.
- Offloading and positioning facilities available if required.
- The optional security cabinet will extend the overall length of the unit by 750mm.

Ref	Capacity of Main Tank ltr	Length mm	Width mm	Height mm	Weight Kilo's
T30	2000	1180	1100	1830	865
T31	3000	1660	1180	1830	1027
T32	5000	2170	1485	1830	1531
T33	7000	2520	1790	1830	1940
T34	10000	3590	1790	1830	2540
T35	15000	4020	2398	1830	3395
T36	20000	5360	2398	1830	4285
T37	25000	6700	2398	1830	5162
T38	30000	6410	3008	1830	5828
T39	40000	8550	3008	1830	7474
T40	50000	10690	3008	1830	8947
T41	60000	10660	3618	1830	9707
T42	70000	12440	3618	1830	11790
T43	80000	14220	3618	1830	13316

## Additional Fittings

- 50mm, 65mm or 80mm fill pipe c/w valves, tanker coupling and cap.
- Venting assembly sized to suit.
- Sludge drain pipe.
- 40mm outlet pipe with valve.
- Electric bund monitoring with alarm.
- Contents gauge in litres.
- Overfill alarm and/or overfill prevention valve.
- Dipstick, dip pipe, cap and chain.
- Dispensing pumps with safety break couplings and automatic nozzle. (3m hose supplied)
- Fuel monitoring systems.
- Optional galvanised ladder and platform.
- Optional distribution board and lighting.
- Optional security cabinet with aluminium roller shutter door and steel doors.

JA

envirotanks

T34 Range

